

# Brugarolas



Industrial lubricants



**HYDRAULIC FLUIDS FOR  
PLASTIC INJECTION  
MACHINERY**

“A Global Supplier  
Since 1885”







Industrial lubricants

Special oils for injection and extrusion plastic machinery, must fulfill a group of requirements and specifications to guarantee smooth functioning since the first moment the machine is turned on.

The life of the fluid, antiwear properties of the pump, and the hydraulic components, all are a key factors to guarantee high performance.

## PRODUCTS

- HYDRAULIC
  - FLUID DRIVE HM – 46
  - FLUID DRIVE B – 4
  - BESLUX DIVOL HV – 46
  - BESLUX DRIVE HLP/SC 46
  - BESLUX DRIVE HV/SC 46
- GUIDES
  - BESLUX LUDER 220
- GREASES
  - G. A. N.238 (antiblocking – nozzle)
  - G. BESLUX FLUOR H – 2 (grease ejectors)

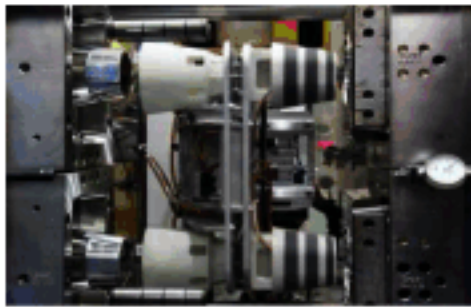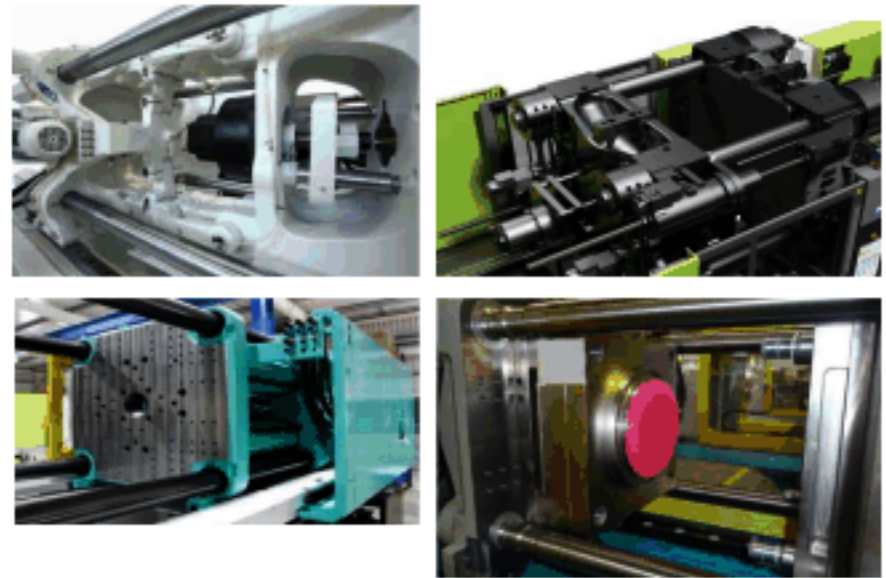

### FLUID DRIVE HM – 46

Hydraulic fluid with ISO HM and DIN HLP certification. Fullfills the basic functioning requirements of injector machine manufacturers.

Viscosity Index: 105

### FLUID DRIVE B – 4

Hydraulic fluid with ISO HM and DIN HLP certification, with the same specifications and the product above. It has Viscosity Index improvers and is a multigrade product that allows to have a fixed viscosity, even in the most extreme high temperature situations.

Viscosity Index: 120

**BESLUX DIVOL HV - 46**

Hydraulic fluid with ISO HV and DIN HVLP certification. It becomes a multigrade due to the amount of additives. Allows the preparation and initial functioning since the moment the engine is turned on. In very cold seasons, there is no need to wait until the fluid becomes stable and the viscosity reduces.

Viscosity Index: 150

**BESLUX DRIVE HLP/SC 46**

Hydraulic fluid with ISO HM and DIN HLP certification, without Zinc content. It has "ash free" additives. This fluid has a very good filtering ability and keeps systems with Servo-pumps and Electro-pumps totally clean, without any sedimentation due to high temperatures and additive crashing.

Viscosity Index: >105

**BESLUX DRIVE HV/SC 46**

Hydraulic fluid with ISO HV and DIN HVLP certification. Without Zinc. It has "ash free" additives. This fluid has a very good filtering ability and keeps systems with Servo-pumps and Electro-pumps totally clean

Viscosity Index: 150

## APPLICATIONS DE LUBRICATING FLUIDS

### APPLICATIONS

- Hydraulic central

- Columns

### CONTACT COMPONENTS

- Pumps
- Filters
- Electro-pumps
- Proportional servo-pumps
  
- Guides





**Industrial lubricants**



**BRUGAROLAS, S.A.**  
 Camino de la Riera, 36-44 (P.I. Cova Solera)  
 08191 Rubí (Barcelona) – ESPAÑA  
**Factory**  
 Phone +34 93 588 31 00  
 Fax. +34 93 588 31 01  
 mailbox@brugarolas.com  
**Commercial Dept**  
 Phone +34 90 222 31 00  
 Fax. +34 93 697 63 01  
 comercial@brugarolas.com


**BRUGAROLAS, ITALIA**  
 C. SO Filippo Turati, 11/C.  
 TORINO - 10128  
 Phone : +39 -011-599114  
 Fax: +39-011-581 89 90  
 info@brugarolasitalia.it

**BRUGAROLAS Deutschland GmbH**  
 Wameler BERG 13b  
 59519 Möhnesee - GERMANY  
 Phone : +49 (0) 2924 3309934  
 Fax: +49 (0) 2924 3309736  
 info@brugarolas.de

**BRUGAROLAS FRANCE**  
 50 rue de la Garenne,  
 38070 St Quentin Fallavier  
 FRANCE  
 Phone: +33 (0) 4 74 95 64 12  
 www.brugarolas.fr  
 brugarolasfrance@brugarolas.com



**Brugarolas** researches, develops, manufactures and supplies lubricants for various industrial activities tested by the highest quality control systems worldwide, meeting the following ISO standards : IQNET ISO 9001, ISO-TS16949.

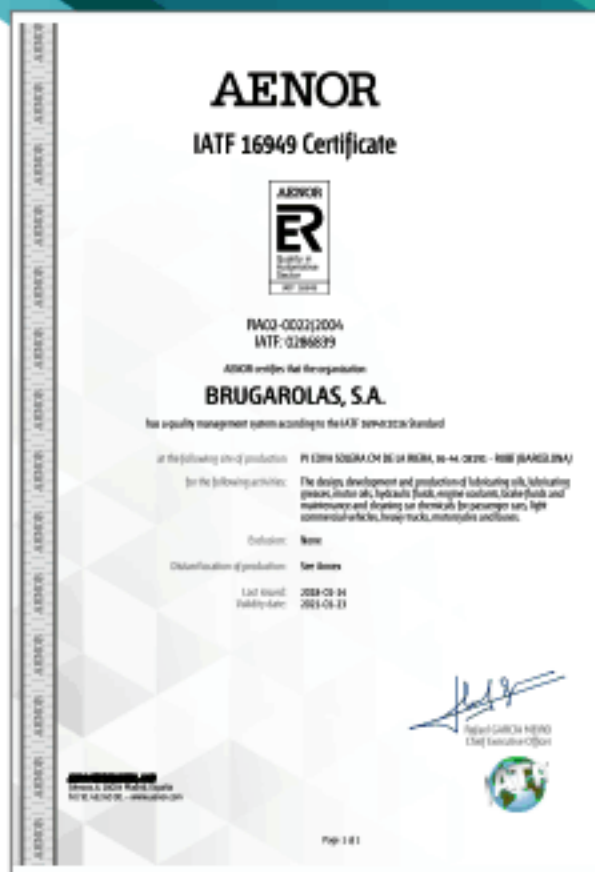

**BRUGAROLAS INDIA PRIVATE LIMITED**  
 105, Richa Trade centre, Sativali Road  
 Above Mahindra showroom, Vasai - East  
 Dist. Palghar - 401208 (India)  
 Sales related queries Phone : +91 741006011 / 12  
 Logistics related queries Phone : +91 741006013  
 Accounts related queries Phone : +91 741006014  
 info@brugarolasindia.com  
 www.brugarolas.com